


INSTALLATION MANUAL LUMIRANK & DID_V TO MYLAPS X2 CLUB

Schematics:

**MyLaps X2 Club
DID_V
LUMIRANK**

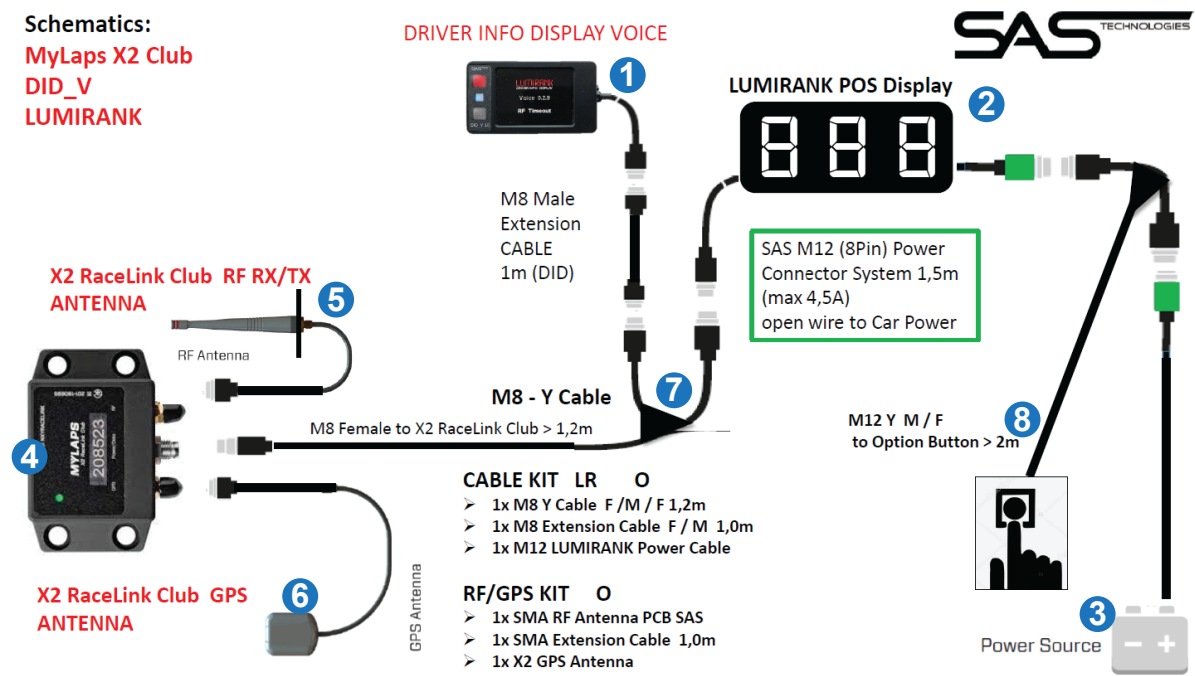

No.	Description	Supplier	Buy / Rent
1	Driver information display with voice	SAS Technologies	Rental included in entry
2	LUMIRANK Position Display	SAS Technologies	Rental included in entry
3	In car 12V power cable	SAS Technologies	First time supply
4	X2 RaceLink Club or Pro	SAS / Timeservice	Buy/Rental
5*	RF Antenna with connection cables	SAS / Timeservice	Buy
6*	GPS Antenna	SAS / Timeservice	Buy
7	Y-Cable Male – Female – Female	SAS / Timeservice	Buy
8	M12 Y M/F to Option button 2m cable	SAS Technologies	Rental included in entry

Remarks:

- Ad 3 – Connect to the 12V power source with a fuse of 5A
- Ad 5 – Mounted on the roof the car with at least 40cm apart from other RF devices
Supplied with a 1m extension cable and a 0,2m connection cable
- Ad 6 – Mounted on the roof of the car
- For the RF antenna a hole needs to be drilled into the roof, there is a magnetic mount available but needs to be glued or taped to the roof as it will NOT stay on the roof above 100 km/h



INSTALLATION MANUAL LUMIRANK & DID_V TO MYLAPS X2 CLUB

Placement of LUMIRANK & STS Driver Information Display

Mount the LUMIRANK display on the inner side of the windscreen and **only** with the **origin adhesive strips**. Connect the display **only** with the **origin SAS Power Cable** (green plug). For a save installation use **always new** self-adhesive strips if you need to reassembly the display. **Never use other** self-adhesive strips or dual lock system.

Adhesive-strips application instructions:

- Clean windscreen before mounting with alcohol
- **Please note:** nano products (anti Fog / Rain X) on the windscreen reduce adhesive strength
- Ambient temperature at least 15 degrees for mounting (full adhesive strength after 24h)
- Use **only** the include back tape around the display edge for driver anti dazzle
- Use **only** clear PU (helitape) for extra security

Teams are responsible for correct power installation and mounting the display in a stable way and must make sure, that the display can't detach from the windscreen.

- LUMIRANK Display - to be placed on the passenger side. 10mm clearance on all sides and always under the windshield banner that is provided by Creventic
- Driver info display – to be placed on dashboard in drivers view
- RF Antenna & GPS Antenna – to be placed on the roof

